

## SHOWA 878R

The extra-thick SHOWA 878R chemical and acid resistant glove offers superior protection against highly corrosive acids, ketones, and esters. Butyl rubber provides the highest permeation resistance to gases and water vapors of any material used to make gloves. Rough surface grip ensures optimum precision and increased durability.




### BENEFITS

- Acid-resistant
- Impermeable
- Water-resistant


### FEATURES

- Unlined
- Rolled Cuff
- Rough grip
- Unsupported
- Butyl rubber

### NORMS & CERTIFICATES

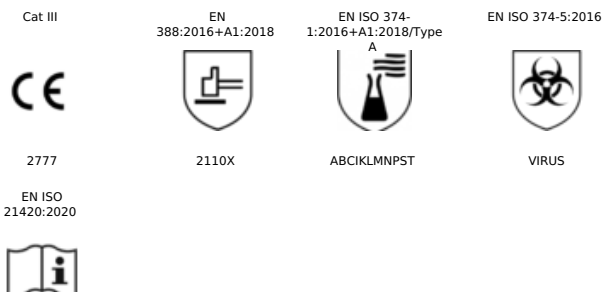

### INDUSTRIES

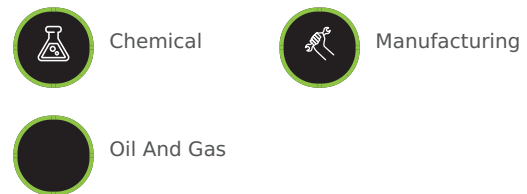

### HAZARDS



### TRADES & APPLICATIONS

- Chemical spray and treatment
- Coating preparation
- Laboratory, pharma & analysis
- Painting & spray workshops
- Fracking
- Drilling

### GET IN TOUCH

SHOWA International | WTC - Tower 2 - Strawinskyalaan 1077 XX Amsterdam - The Netherlands  
 showagroup.com | info@showagroup.eu  
 © SHOWA GROUP 2025 | All rights reserved

## PACKAGING

---

- Pair per polybag: 1

## THICKNESS

---

28 mil

## LENGTH

---

14 in. (350 mm)

## COATING

---

- Butyl
- Chemical Resistant
- Water Resistant

## LINERS

---

- Unsupported

## SIZES

---

7/S | 8/M | 9/L | 10/XL | 11/XXL

## COLOUR

---

- Black

## MATERIAL

---

- Unsupported

## GRIP

---

- Rough

## USER INSTRUCTIONS

Gloves provide protection from chemical and mechanical hazards shown. Do not use gloves that show signs of wear. If required, cleanse outer surface of glove with running water. Discard used gloves in compliance with local regulations. Do not wear gloves when there is a risk of entanglement by moving parts of machines.

## DISCLAIMER

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

---

## GET IN TOUCH

SHOWA International | WTC - Tower 2 - Strawinskylaan 1077 XX Amsterdam - The Netherlands  
showagroup.com | info@showagroup.eu  
© SHOWA GROUP 2025 | All rights reserved