

## SHOWA 874

The SHOWA 874 chemical resistant glove offers superior protection against highly corrosive acids, ketones, and esters. Butyl rubber provides the highest permeation resistance to gases and water vapors of any material used to make gloves. A smooth surface grip provides unmatched tactility and performance.




### BENEFITS

- Acid-resistant
- Impermeable
- Water-resistant

### FEATURES

- Unlined
- Rolled Cuff
- Smooth grip
- Unsupported
- Butyl rubber

### NORMS & CERTIFICATES

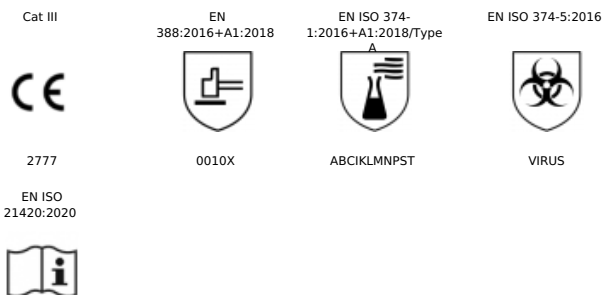

### INDUSTRIES

### HAZARDS

### TRADES & APPLICATIONS

- Chemical spray and treatment
- Coating preparation
- Laboratory, pharma & analysis
- Painting & spray workshops
- Fracking
- Drilling
- Deck crew

### GET IN TOUCH

SHOWA International | 579 Edison Street, Menlo, GA 30731, USA | [showagroup.com](http://showagroup.com) | [USA@SHOWAGroup.com](mailto:USA@SHOWAGroup.com)  
 © SHOWA GROUP 2025 | All rights reserved

## PACKAGING

---

- Pair per polybag: 1
- Polybags per case: 12
- Pair per case: 12

## THICKNESS

---

14 mils

## LENGTH

---

14 in

## COATING

---

- Butyl

## LINERS

---

- Unlined

## SIZES

---

7/S | 8/M | 9/L | 10/XL | 11/XXL

## COLOUR

---

- Black

## MATERIAL

---

- Unsupported

## GRIP

---

- Smooth

## USER INSTRUCTIONS

Gloves provide protection from chemical and mechanical hazards shown. Do not use gloves that show signs of wear. If required, cleanse outer surface of glove with running water. Discard used gloves in compliance with local regulations. Do not wear gloves when there is a risk of entanglement by moving parts of machines.

## DISCLAIMER

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

---

## GET IN TOUCH

SHOWA International | 579 Edison Street, Menlo, GA 30731, USA | [showagroup.com](http://showagroup.com) | [USA@SHOWAGroup.com](mailto:USA@SHOWAGroup.com)  
© SHOWA GROUP 2025 | All rights reserved